N.T.S.

PRUNE ALL DAMAGED OR DEAD

SET SHRUB 2" HIGHER THAN THE

WOOD IMMEDIATELY PRIOR TO

GRADE AT WHICH IT GREW.

landscape architecture site planning 700 colorado boulevard, suite 131 denver, colorado 80206 303.512.0549 www.meuran.com

site design

17851 E 40TH AV AURORA, COLORADO

|-|2|E|4|G|9| PA / PM: DRAWN BY: JOB NO.: 18.107

SHEET

- APPLY SPECIFIED MULCH 4" DEEP. SEE SPECIFICATIONS FOR FERTILIZER APPLICATION IN BACKFILL MIXTURE. DIG PLANT PIT TWICE AS WIDE AS THE CONTAINER OR MORE. - REMOVE CONTAINER. LOOSEN SIDES OF PLANT PIT AND ROOTBALL. FILL PLANT PIT WITH SPECIFIED SOIL MIX INCLUDING SPECIFIED FERTILIZER. - CONCRETE CURB OR SIDEWALK. 2. HOLD GRADE 1" BELOW EDGE OF WALK OR CURB. THIS DETAIL

NOTES:

2'-0" MIN.

- 1. ANY BROKEN OR CRUMBLING ROOTBALL WILL BE REJECTED. REMOVING THE CONTAINERS WILL NOT BE AN EXCUSE FOR DAMAGED ROOTBALLS.
- SHALL ALSO APPLY TO PERENNIAL FLOWERS IN CONTAINER.
- 3. ALL JUNIPER PLANTS SHOULD BE PLANTED SO TOP OF ROOT MASS OCCURS AT FINISH GRADE OF MULCH LAYER.



— DO NOT CUT LEADER - SPECIFIED TRUNK ATTACHMENT - DOUBLE STRAND SPECIFIED WIRE PROVIDE 3 GUY SYSTEMS EQUI-DISTANT AROUND TREE. GUY TREES AS PER DIAGRAM. PLACE 1/2" WHITE PVC, 24" LENGTH ON ALL GUYING - SPECIFIED WOOD MULCH (4" DEPTH IN ALL AREAS) -REMOVE ALL TWINE AND WIRE, PULL BURLAP BACK 2/3 MINIMUM SPECIFIED STAKES DRIVEN FLUSH WITH GRADE PLANT TOP OF ROOT BALL AT FINAL GRADE W/ WATERING BASIN IN NATIVE GRAŚS AREAS. PLANT ROOT BALL 3" HIGHER THAN FINAL GRADE IN IRRIGATED LAWN AREAS. - SPECIFIED BACKFILL/FERTILIZER SET ROOT BALL ON EXISTING UNDISTURBED SUB—SOIL.

– REMOVE ALL TWINE AND WIRE, PULL BURLAP BACK 2/3 MINIMUM UNDISTURBED OR COMPACTED 1. INSTALL SPECIFIED MULCH TO DRIPLINE OF TREE WHERE PLANTED -SETTLING OF ROOTBALL SHALL

N.T.S.

DO NOT CUT SINGLE LEADER, PRUNE DAMAGED OR DEAD WOOD, AND CO-DOMINANT LEADERS AT LANDSCAPE ARCHITECT'S DIRECTION ONLY.

14 GAUGE GALV. WIRE WITH 1/2 DIA. WHITE PVC ON ENTIRE LENGTH OF

- SPECIFIED TREE STRAP — ALIGN NW/SE

- WRAP ENTIRE SURFACE OF TRUNK UP TO SECOND BRANCH WITH SPECIFIED WRAPPING SECURED AT TOP AND BOTTOM & AT TWO FOOT INTERVALS. RE: SPECS FOR TIMING

- RE: FINAL TOP ROOTBALL GRADE

36" DIA., 4" SPECIFIED WOOD MULCH RING, TYP. IN TURF AREAS.

- PLANT TREE 3" ABOVE FINAL TOP ROOTBALL GRADE

- GRADE TO SLOPE AWAY FROM

- SPECIFIED BACKFILL/FERTILIZER AS PER SPECIFICATIONS

BE CAUSE FOR REJECTION

- SPECIFIED POSTS

ROOTBALL

SUBGRADE

IN GRASS AREAS. 2. DO NOT PROVIDE WATER BASIN IN IRRIGATED LAWN AREAS.


EVERGREEN TREE PLANTING

N.T.S.

CONCRETE CURB OR SIDEWALK VARIES HOLD GRADE 1 IN. SEE PLANS BELOW EDGE SET ORNAMENTAL GRASS AT THE GRADE AT WHICH IT GREW SPECIFIED MULCH 3" DEEP HAND LOOSEN ROOTS OF CONTAINERIZED MATERIAL, TYP. REMOVE CONTAINER SPECIFIED BACKFILL MIXTURE

DECIDUOUS TREE PLANTING

ORNAMENTAL GRASS DETAIL

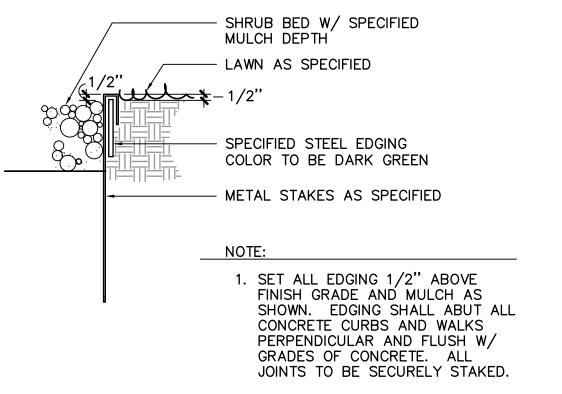

STEEL EDGER DETAIL

N.T.S.

NOT FOR CONSTRUCTION